


Heightrider 15_N

The Nifty Height Rider 15N offers one of the best working envelopes in its class. Designed using the latest computer technology, it delivers unrivalled working outreach combined with pinpoint accuracy when positioning the platform. A super narrow base as standard with the option of Bi-Energy power makes it ideal for a wide range of applications.

Safety Features

- ▶ Automatic failsafe brakes
- ▶ Tilt alarm
- Solid tyres
- ► Emergency descent system with hand-pump
- ▶ Dual controls (platform & base)
- ► Lock valves on all hydraulic cylinders
- Dual Harness Points
- ► CE Mark

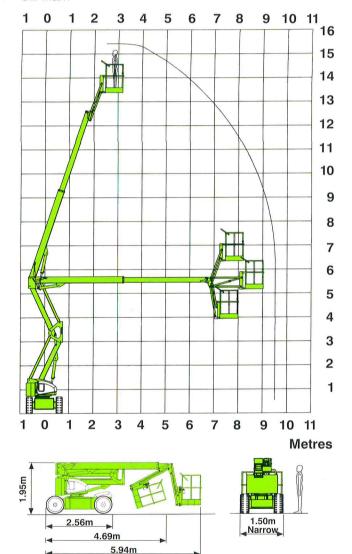



With more outreach than any other machine in its class and a base width of only 1.50m, the HR15N is one of the most effective and versatile self-propelled platforms available.

Specifications

Specifications		
Working Height	15.60m	51ft
Platform Height	13.60m	44ft 7in
Working Outreach	9.60m	31ft 6in
Flyboom Operation	150°	
Width	1.50m	4ft 11in
Height Stowed	1.95m	6ft 6in
Overall Length	5.94m	19ft 6in
Weight	6400kg	14,097lbs
Turning Radius (inside)	1.21m	3ft 11in
(outside)	3.31m	10ft 10in
Platform Rotation	100°	
Platform Capacity	225kg	500lbs
Platform Size	1.50m x 0.70m	60in x 29in
Drive Speed	4kmph	2.5mph
Gradeability	25%	
Tyres	Solid, non-marking optional	
Control System	Fully proportional electric over hydraulic	
Power Options	Bi-Energy, with Kubota 722 3 cylinder diesel Battery only	

Due to a policy of continuing development and improvement Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

platfo ISO REGIST

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms



Niftylift Ltd

Fingle Drive Stonebridge Milton Keynes MK13 0ER England www.niftylift.com

e.mail: info@niftylift.com Tel: +44 (0)1908 223456 Fax: +44 (0)1908 312733